


## Features:

- AAMA standard Tested and Certified
- Structural thermal breaks
- Coped corner construction
- 1" sealed insulating glass per ASTM E 2190-02 tested and approved
- Aluminum bead glazed
- Operable hung tilt sash for easy cleaning
- Stainless steel pivot bars
- Positive interlocks
- Double fin type weather stripping
- Full-width lift handles
- Spiral sash balances
- Self-aligning high-security cam-type sash locks
- Vent screens with charcoal colored fiberglass mesh
- Self-stacked mullionless mating with other 4000 series windows
- Manufactured on 1/8" increments
- 1/2" extended sill leg
- Kynar 2605 finish in 25 standard colors.

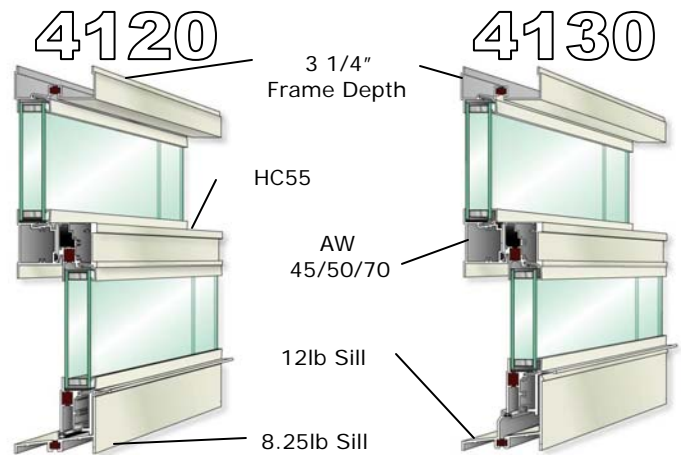

## Options:

- Between-the-glass, exterior applied, interior tape applied, or true muntins
- Aluminum or solar screen mesh
- All commercially available glazing materials
- Limited sash travel
- Pole ring, cast bronze, automatic or keyed sash locks
- Single glazing available
- Standard and custom panning
- Receptor, mullion, and sub-sill systems
- Factory-provided equal length sill legs when needed for stacking or use with sub-sill or existing horizontal sill of opening
- Class 5 balances (Ultra-Lift)
- Single hung 3-lite design
- Various high performance modifications
- Custom colors, 2603 Fluorocryl, 2604 Kynar, and anodized finishes

